Fig. 1




Fig. 2



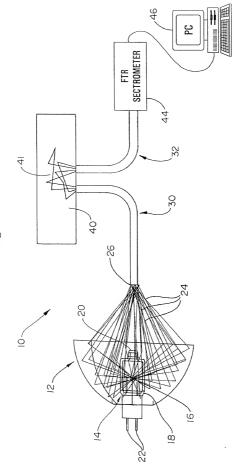



Fig. 3a



Data covers +/- 50.000 degrees from Normal Collected Flux: 45.6 W, 101892 Rays Min:4.8629e-007 W/sr, Max:119.54 W/sr, Total Flux: 45.6 W

Fig. 3b






Irradiance Min:0.00023877 W/m2, Max:27743 W/m2, Normalized Flux:0.096859 104037 Incident Rays


Fig. 3c

Total – Irradiance Map for Incident Flux Exit Surface




Irradiance Min:3.4712e-005 W/m2, Max:12099 W/m2, Normalized Flux:0.054985 59253 Incident Rays


Fig. 4a



Irradiance Min:0.00042231 W/m2, Max:20485 W/m2, Normalized Flux:0.094876 101892 Incident Rays


Fig. 4b





Irradiance Min:0.00023877 W/m2, Max:27743 W/m2, Normalized Flux:0.096859 104037 Incident Rays

Fig. 4c



Data covers +/- 50.000 degrees from Normal Collected Flux: 26.431 W, 59253 Rays Min:2.4668e-008 W/sr, Max:365.41 W/sr, Total Flux: 26.431 W

46 გ SECTROMETER 44 FTR 32 >30 Fig. 5 78 4 `26 20 2 9 $\frac{\omega}{l}$

Fig. 6





Fig. 7



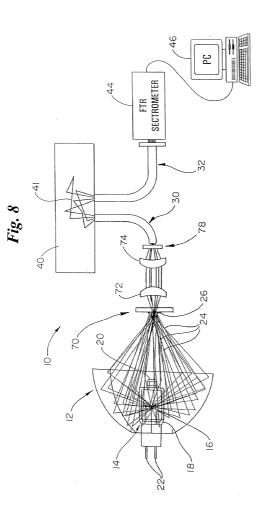




Fig. 9B




Fig. 10


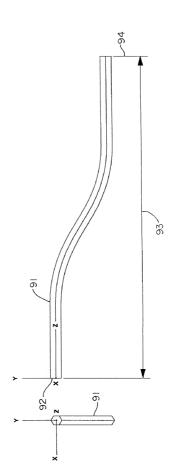


Fig. 11A

Fig. 11B





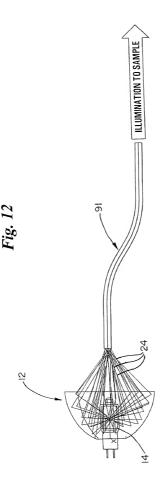



Fig. 13a






Irradiance Min:0.00023071 W/m2, Max:15747 W/m2, Normalized Flux:0.14181 116810 Incident Rays


Fig. 13b






Irradiance Min:0.00032399 W/m2, Max:19613 W/m2, Normalized Flux:0.17434 114383 Incident Rays


Fig. 13c






Irradiance Min:5.3024e-005 W/m2, Max:14361 W/m2, Normalized Flux:0.12676 86490 Incident Rays

Fig. 14a




Data covers +/- 50.000 degrees from Normal Collected Flux: 1.3936 W, 116196 Rays Min:2.4814e-008 W/sr, Max:1.7072 W/sr, Total Flux: 1.401 W

Fig. 14b



Data covers +/- 50.000 degrees from Normal Collected Flux: 1.3649 W, 113799 Rays Min:1.1537e-008 W/sr, Max:1.6245 W/sr, Total Flux: 1.3719 W

Fig. 14c



Data covers +/- 50.000 degrees from Normal Collected Flux: 1.0319 W, 86036 Rays Min:7.852e-008 W/sr, Max:1.323 W/sr,

Total Flux: 1.0373 W

Fig. 15

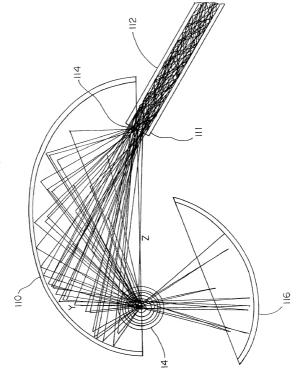


Fig. 16





Fig. 17



Data covers +/- 40.000 degrees from Normal

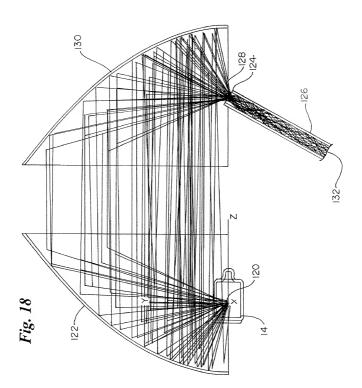


Fig. 19





Fig. 20



Data covers +/- 40.000 degrees from Normal

Fig. 21





Fig. 22


Total – Irradiance Map for Incident Flux Exit Surface



Irradiance Min:0.249e-005 W/m2, Max:3265.5 W/m2, Normalized Flux:0.018369 16288 Incident Rays

Fig. 23

Polar Iso-Candela Plot Using incident rays on Exit Surface




Data covers +/- 50.000 degrees from Normal Collected Flux: 7.1784W, 16288 Rays Min:2.1681e-009 W/sr, Max:39.106W/sr, Total Flux: 7.1784W

FTR SECTROMETER 44 43, 78 4 6 $\overline{\alpha}$ 9

76/

30 32/

Fig. 24






Fig. 25D




Fig. 26




Fig. 27

